

规格书

Product Specification

客户名称 Customer	
客户项目号 Part NO	
产品型号 Part NO	H0165Y008T008 V0
产品内容 Product type	Mode:Transmissive type .Normally black. TFTLCD Module LCD Module: 1.65" 400RGB*400Dot QSPI 圆屏
客户确认签章 Signature by Customer:	

PREPARED BY	CHECKED BY	APPROVED BY

[illegible]

Table of Contents 目录

1	General Description 规格简介	4
2	Module Parameter 模组参数	4
3	Mechanical Drawings 结构图	5
4	Module Interface 模组接口定义	6
5	Application Circuit 应用电路	6
6	Absolute Maximum Ratings 绝对最大额定值	7
7	Electrical Specification 电性规格	8
8	Initialization Code 初始化代码	8
9	Optical Specifications 光学规格	8
9.1	Optical Specifications 光学规格	10
9.2	The power on/off sequence is illustrated below 电源启动/关闭顺序	11
9.3	Definition of Contrast Ratio 对比度的定义	11
9.4	Definition of Viewing Angles 视角的定义	11
9.5	Definition of Color Appearance 色域的定义	11
9.6	Definition of Surface Luminance, Uniformity and Transmittance	12
	表面亮度、均匀性和透光率的定义	12
10	Quality Assurance 质量标准	14
10.1	Purpose 目的	12
10.2	Agreement Items 协议项目	12
10.3	Standard of the Product Visual Inspection 产品外观检验标准	12
10.4	Inspection Specification 检验标准	13
10.5	Classification of Defects 缺陷的分类	17
10.6	Identification/marketing criteria 识别/评分标准	17
10.7	Packing 包装	17
11	Reliability Specification 可靠性规范	17
12	Precautions and Warranty 注意事项和保证	18
12.1	Safety 安全	18
12.2	Handling 处理	18
12.3	Operation 操作	18
12.4	Static Electricity 静电	19
12.5	Limited Warranty 有限质量保证	19
13	Packaging 包装	19
14	Prior Consult Matter 免责声明	19

1 General Description 规格简介

This display module is a transmissive type color active matrix TFT(Thin Film Transistor) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This module is composed of a TFT LCD module, a driver circuit, and a back-light unit. The resolution of a 1.65" contains 400RGB x 400 dots and can display up to 16.7M colors.

该显示模块是一种采用非晶硅 TFT 作为开关器件的透射型彩色有源矩阵 TFT(薄膜晶体管)液晶显示器。该模块由 TFT 液晶显示模块、驱动电路和背光单元组成。1.65 英寸的分辨率包含 400RGB x 400 点，可显示高达 16.7M 的颜色。

2 Module Parameter 模组参数

Features	Details	Unit
Display Size(Diagonal) 显示尺寸(对角线)	1.65	inch
LCD type 液晶显示屏类型	α -Si TFT	-
Display Mode 显示模式	IPS / Transmissive / Normally Black	-
Resolution 分辨率	400RGB x 400	-
Active Area 显示区	Φ 39.84	mm
Module Outline 模组外形	42.94(H) \times 45.89(V) \times 1.56(T)	mm
Display Colors 显示颜色	16.7M	-
Interface 接口	QSPI	-
Driver IC 驱动 IC	ST77903	-
TP Viewing Area TP 视窗	Φ 40.24	mm
TP Outline(assembly) TP 外形	43.84(H) \times 45.04(V) \times 3.49(T)	mm
Luminance on surface 亮度	350	cd/m ²
View Direction 视角方向	All	Best image
Contrast ratio 对比度	1000:1	
Color gamut 色域	65%	
PPI 图像点密集度	255	-
Window effect 视窗效果	无一体黑	-
Cover plate surface effect 盖板表面效果	镀 AF	-
Operating Temperature 工作温度	-20 \sim 70	°C
Storage Temperature 储存温度	-30 \sim 80	°C
Weight 重量	TBD	g

Note 1: Excluding hooks, posts , FPC/FPC tail etc.

[illegible]


4 Module Interface 模组接口定义

NO	SYMBOL	FUNCTION
1	CS	Chip selection pin; Low enable, High disable
2	SIO0	QSPI Data 0 lane pin.
3	SIO1	QSPI Data 1 lane pin
4	SCLK	QSPI clock pin
5	SIO3	QSPI Data 3 lane pin
6	SIO2	QSPI Data 2 lane pin
7	NC	OPEN
8	NC	OPEN
9	RESET	This signal will reset the device and it must be applied to properly initialize the chip. Signal is active low
10	NC	OPEN
11	NC	OPEN
12	NC	OPEN
13	GND	Power Ground
14	TE	Tearing effect output pin to synchronize MPU to frame writing, activated by S/W command. When this pin is not activated, this pin is low. If not used, open this pin
15	VDD	Power Supply for Analog, VDD=2.4V~3.3V.
16	LEDK	LED Cathode
17	LEDA	LED Anode
18	GND	Power Ground
19	TP SCL	Touch panel I2C clock
20	TP SDA	Touch panel I2C data
21	TP RST	Touch panel reset
22	TP INT	Touch panel interrupt output
23	TP VDD	Touch panel Power output
24	GND	Power Ground

5 Application Circuit 应用电路


5.1 Backlight recommended circuit 背光电路参考

Motherboard driver backlight is need constant current circuit, if the rated voltage screen after light brightness difference. Current and power consumption of the machine are inconsistent, so recommend a backlight driving circuit is best rated current. It is recommended to use IC (AW9364). The reference circuit is as follows:



5.2 Backlight recommended circuit 背光电路参数推荐


Motherboard driver backlight is need constant current circuit:



3 灯并联

Note: constant current circuit for every LED, and though LED lamp current is less than 20mA. Recommend between 15mA and 20 mA for every LED.

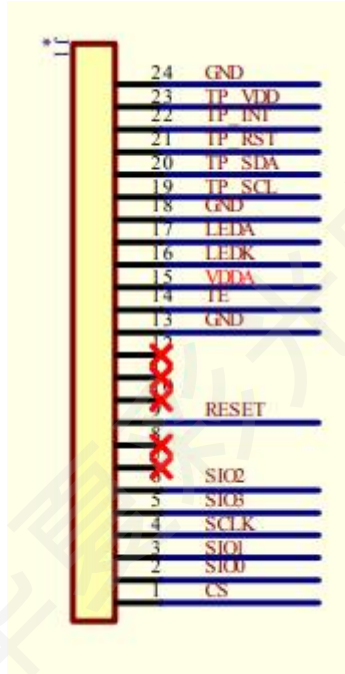5.3 Application Circuit 应用电路 ()



6 Absolute Maximum Ratings 绝对最大额定值

VSS=0V, Ta=25°C

Item 项目		Symbol	Min.最小	Max.最大	Unit 单位
Supply Voltage 电源电压	Power supply 电力供应	VDD	-0.3	+4.6	V
	Analog 模拟	-	-	-	V
	IO	IOVDD	-0.3	+4.6	V

Input Voltage 输入电压	V_i	-0.3	IOVDD+0.3	V
Storage temperature 储存温度	T_{stg}	-30	+70	°C
Operating temperature 工作温度	T_{op}	-20	+60	°C
Storage humidity 存储湿度	H_{stg}	10	Note 1	%RH
Operating humidity 操作湿度	H_{op}	10	Note 1	%RH

Note 1: 90%RH max, If Ta is below 50°C; 60%RH max, If Ta is over 60°C.

7 Electrical Specification 电性规格

DC Characteristics 直流特性

Item 项目		Symbol	Min.最小	Typ.中间	Max.最大	Unit 单位
Supply Voltage 电源电压	Powersupply 电力供应	VDD	2.4	2.8	3.3	V
	Analog	VCI	2.4	2.8	3.3	V
	IO	IOVDD	1.65	1.8/2.8	3.3	V
Logic Low input voltage 输入电压低		V _{IL}	-0.3IOVDD	-	0.3IOVDD	V
Logic High input voltage 输入电压高		V _{IH}	0.7IOVDD	-	IOVDD	V
Logic Low output voltage 输出电压低		V _{OL}	-	-	0.2IOVDD	V
Logic High output voltage 输出电压高		V _{OH}	0.8IOVDD	-	-	V
Current Consumption 电 流消耗	Normal display 正常的显示	Ivdd	-	30	-	mA
	Standby mode 待机模式	Ivdd	-	60	-	uA
Frame Frequency 帧频		f _{FR}	-	60	-	Hz

8 Initialization Code 初始化代码

```

reset_ms 20          set 0xcc          set 0x22
delay_ms 120         send 0xc1         set 0x04
send 0xf0            set 0x77          send 0xc4
set 0xc3             set 0x07          set 0x22
send 0xf0            set 0xcf          set 0x02
set 0x96             set 0x16          set 0x22
send 0xf0            send 0xc2         set 0x04
set 0xa5             set 0x77          send 0xc5
send 0xe9            set 0x07          set 0xed
set 0x20             set 0xcf          send 0xe0
send 0xe7            set 0x16          set 0x87
set 0x80             send 0xc3         set 0x09
set 0x77             set 0x22          set 0x0c
set 0x1f             set 0x02          set 0x06

```


set 0x05	set 0xbe	set 0x00
set 0x03	set 0xf5	set 0x00
set 0x29	set 0xb1	set 0x00
set 0x32	set 0x22	set 0x15
set 0x49	set 0x22	set 0x2a
set 0x0f	set 0x25	set 0x8a
set 0x1b	set 0x10	set 0x02
set 0x17	set 0x22	send 0xba
set 0x2a	set 0x22	set 0x0a
set 0x2f	set 0x22	set 0x5a
send 0xe1	set 0x22	set 0x23
set 0x87	set 0x22	set 0x10
set 0x09	set 0x22	set 0x25
set 0x0c	set 0x22	set 0x02
set 0x06	send 0xec	set 0x00
set 0x05	set 0x40	send 0xbb
set 0x03	set 0x03	set 0x00
set 0x29	send 0xb2	set 0x30
set 0x32	set 0x00	set 0x00
set 0x49	send 0xb3	set 0x2c
set 0x0f	set 0x01	set 0x82
set 0x1b	send 0xb4	set 0x87
set 0x17	set 0x00	set 0x18
set 0x2a	send 0xb5	set 0x00
set 0x2f	set 0x00	send 0xbc
send 0xe5	set 0x08	set 0x00
set 0xbe	set 0x00	set 0x30
set 0xf5	set 0x08	set 0x00
set 0xb1	send 0xa5	set 0x2c
set 0x22	set 0x00	set 0x82
set 0x22	set 0x00	set 0x87
set 0x25	set 0x00	set 0x18
set 0x10	set 0x00	set 0x00
set 0x22	set 0x00	send 0xbd
set 0x22	set 0x15	set 0xa1
set 0x22	set 0x2a	set 0xb2
set 0x22	set 0x8a	set 0x2b
set 0x22	set 0x02	set 0x1a
set 0x22	send 0xa6	set 0x56
set 0x22	set 0x00	set 0x43
send 0xe6	set 0x00	set 0x34

set 0x65	set 0x00	send 0x21
set 0xff	send 0x36	send 0x11
set 0xff	set 0x0c	delay_ms 120
set 0x0f	send 0x3a	send 0x29
send 0x35	set 0x07	


9 Optical Specifications 光学规格

9.1 Optical Specifications 光学规格

Ta=25°C, VDD=2.8V, TN LC+ Polarizer

Backlight On (Transmissive Mode)	Item 项目		Symbol 标志	Condition 条件	Specification 规范			Unit 单位	
					Min. 最小	Typ. 中间	Max. 最大		
	Luminance on surface(I_f =20mA) 表面亮度		L_v	$\theta_x=\theta_y=0^{\circ}$		350	-	cd/m ²	
	Contrast ratio 对比度		CR		800	1000	-	-	
	Response time 响应时间		TR		-	10	15	ms	
			TF	-	20	20			
	Chromaticity Transmissive 色度		Red 红	XR	-	-	0.657	-	-
				YR		-	0.322	-	-
			Green 绿	XG		-	0.284	-	-
				YG		-	0.566	-	-
			Blue 蓝	XB		-	0.139	-	-
				YB		-	0.108	-	-
			White 白	XW		-	0.303	-	-
				YW		-	0.333	-	-
	Viewing Angle 视角		Horizo ntal	$\theta X+$	Center $CR\geq 10$	80	85	-	Deg.
				$\theta X-$		80	85	-	
			Vertical	$\theta Y+$		80	85	-	
				$\theta Y-$		80	85	-	
	NTSC Ratio(Gamut)			-	-	60	65	-	%

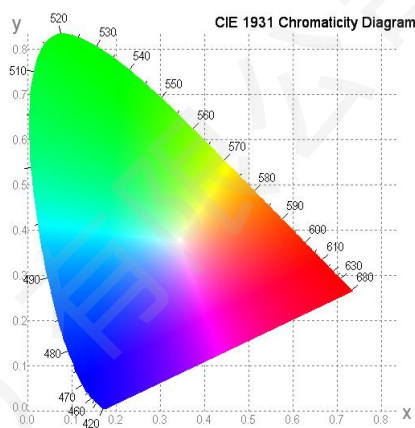Measuring picture: Red, Green, Blue and White (Measuring machine: BM-7)



9.6 Definition of Surface Luminance, Uniformity and Transmittance

表面亮度、均匀性和透光率的定义

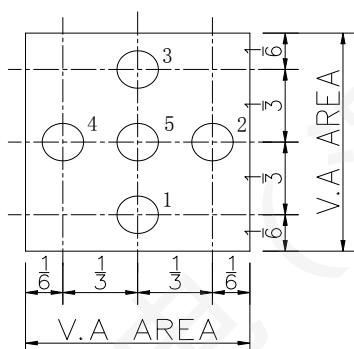
Using the transmissive mode measurement approach, measure the white screen luminance of the display panel and backlight.

9.6.1 Surface Luminance: $LV = \text{average (LP1:LP5)}$

9.6.2 Uniformity = $\text{Minimal (LP1:LP5)} / \text{Maximal (LP1:LP5)} * 100\%$

9.6.3 Transmittance = $LV \text{ on LCD} / LV \text{ on Backlight} * 100\%$

Note :Measuring machine:BM-7



10 Quality Assurance 质量标准

10.1 Purpose 目的

This standard for Quality Assurance assures the quality of LCD module products supplied to customer by HuaXia RGB Display.

10.2 Agreement Items 协议项目

HuaXia RGB Display and customer shall negotiate if the following situation occurs:

10.2.1 Discrepancies between HuaXia RGB Display's QA standards and customer's QA standards.

10.2.2 Additional requirement to be added in product specification.

10.2.3 Any other special problem.

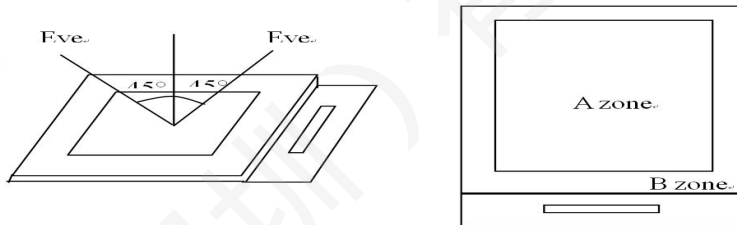
10.3 Standard of the Product Visual Inspection 产品外观检验标准

10.3.1 Appearance inspection:

10.3.1.1 The inspection must be under illumination about 1000 – 1500 lx, and the distance of view must be at 30cm ± 2cm.

10.3.1.2 The viewing angle should be 45° from the vertical line without reflection light or follows customer's viewing angle specifications.

10.3.1.3 Definition of area: A Zone: Active Area, B Zone: Viewing Area.



10.3.2 Basic principle: A set of sample to indicate the limit of acceptable quality level must be discussed by both HuaXia RGB Display and customer when there is any dispute happened.




10.4 Inspection Specification 检验标准




Sampling plan according to GB/T2828.1-2012/ISO 2859-1: 1999 and ANSI/ASQC






Z1.4-1993, normal level 2 and based on:

Major defect: AQL 0.4

Minor defect: AQL 1.0

No.	Item 项目	Criteria (Unit: mm) 标准															
01	Black / White spot Foreign material (Round type) Pinholes Stain Particles inside cell. (Minor defect) 黑/白斑/异物 (圆类型)细胞内的针孔染色颗粒。(小瑕疵)	 <table border="1" data-bbox="949 1131 1428 1534"> <thead> <tr> <th>Size</th><th>Area</th><th>Acc. Qty</th></tr> </thead> <tbody> <tr> <td>$\phi \leq 0.10$</td><td></td><td>Ignore</td></tr> <tr> <td>$0.10 < \phi \leq 0.2$</td><td></td><td>2</td></tr> <tr> <td>$0.2 < \phi$</td><td></td><td>0</td></tr> <tr> <td>Total</td><td></td><td>$N \leq 3$ NO include $\phi \leq 0.10$</td></tr> </tbody> </table> <p>$\phi = (a + b) / 2$ Distance between 2 defects should more than 10mm apart.</p>	Size	Area	Acc. Qty	$\phi \leq 0.10$		Ignore	$0.10 < \phi \leq 0.2$		2	$0.2 < \phi$		0	Total		$N \leq 3$ NO include $\phi \leq 0.10$
Size	Area	Acc. Qty															
$\phi \leq 0.10$		Ignore															
$0.10 < \phi \leq 0.2$		2															
$0.2 < \phi$		0															
Total		$N \leq 3$ NO include $\phi \leq 0.10$															
02	Black and White line Scratch Foreign material (Line type) (Minor defect) 黑白线刮伤异物(类型)行 (小瑕疵)	 															

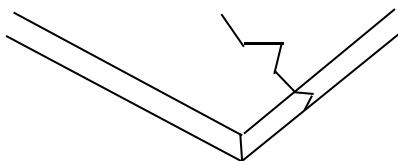No.	Item 项目	Criteria (Unit: mm) 标准															
		<table><tr><th>Length</th><th>Width</th><th>Acc. Qty</th></tr><tr><td>/</td><td>$W \leq 0.03$</td><td>Ignore</td></tr><tr><td>$L \leq 3$</td><td>$0.05 < W \leq 0.08$</td><td>2</td></tr><tr><td>/</td><td>$0.08 < W$</td><td>0</td></tr><tr><td colspan="2">Total</td><td>$N \leq 2$</td></tr></table> <p>Distance between 2 defects should more than 10mm apart. Scratches not viewable through the back of the display are acceptable.</p>	Length	Width	Acc. Qty	/	$W \leq 0.03$	Ignore	$L \leq 3$	$0.05 < W \leq 0.08$	2	/	$0.08 < W$	0	Total		$N \leq 2$
Length	Width	Acc. Qty															
/	$W \leq 0.03$	Ignore															
$L \leq 3$	$0.05 < W \leq 0.08$	2															
/	$0.08 < W$	0															
Total		$N \leq 2$															
03	Glass Crack (Minor defect) 玻璃裂纹(小瑕疵)	 <p>LCD with extensible crack line is unacceptable(When press the cracked LCD area, the line will expand, we define it is extensible crack line)</p>															
04	Glass Chipping Pad Area: (Minor defect) 玻璃碎片面积:(轻微缺陷)	<table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td>$c < 5.0, b < 0.4$</td><td>Ignore</td></tr></table> 	Length and Width	Acc. Qty	$c < 5.0, b < 0.4$	Ignore											
Length and Width	Acc. Qty																
$c < 5.0, b < 0.4$	Ignore																
05	Glass Chipping Rear of PadArea:(Minor defect)) 玻璃切屑垫区后方: (小瑕疵)	<table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td>$c > 3.0, b < 1.0$</td><td>1</td></tr><tr><td>$c < 3.0, b < 1.0$</td><td>2</td></tr><tr><td>$c < 3.0, b < 0.5$</td><td>4</td></tr><tr><td colspan="2">$a < \text{Glass Thickness}$</td></tr></table> 	Length and Width	Acc. Qty	$c > 3.0, b < 1.0$	1	$c < 3.0, b < 1.0$	2	$c < 3.0, b < 0.5$	4	$a < \text{Glass Thickness}$						
Length and Width	Acc. Qty																
$c > 3.0, b < 1.0$	1																
$c < 3.0, b < 1.0$	2																
$c < 3.0, b < 0.5$	4																
$a < \text{Glass Thickness}$																	

No.	Item 项目	Criteria (Unit: mm) 标准								
06	Glass Chipping Except Pad Area: (Minor defect) 除垫区外的玻璃切屑:(小瑕疵) 	<table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td>$c \leq 0.6, b < 5.0$</td><td>Ignore</td></tr><tr><td colspan="2">a<Glass Thickness</td></tr></table>	Length and Width	Acc. Qty	$c \leq 0.6, b < 5.0$	Ignore	a<Glass Thickness			
Length and Width	Acc. Qty									
$c \leq 0.6, b < 5.0$	Ignore									
a<Glass Thickness										
07	Glass Corner Chipping: (Minor defect) 玻璃切角:(小瑕疵) 	<table><tr><th>Length and Width</th><th>Acc. Qty</th></tr><tr><td>$c < 2.0, b < 1.5$</td><td>Ignore</td></tr><tr><td>$c < 1.5, b < 2$</td><td>Ignore</td></tr><tr><td colspan="2">a<Glass Thickness</td></tr></table>	Length and Width	Acc. Qty	$c < 2.0, b < 1.5$	Ignore	$c < 1.5, b < 2$	Ignore	a<Glass Thickness	
Length and Width	Acc. Qty									
$c < 2.0, b < 1.5$	Ignore									
$c < 1.5, b < 2$	Ignore									
a<Glass Thickness										
08	Glass Burr: (Minor defect) 玻璃磨:(小瑕疵) 	Glass burr don't affect assemble and module dimension. <table><tr><th>Length</th><th>Acc. Qty</th></tr><tr><td>$F < 0.5$</td><td>Ignore</td></tr></table>	Length	Acc. Qty	$F < 0.5$	Ignore				
Length	Acc. Qty									
$F < 0.5$	Ignore									
09	FPC Defect: (Minor defect) FPC 缺陷:(小瑕疵) 	9.1 Dent, pinhole width $a < w/3$. (w: circuitry width.) 9.2 Open circuit is unacceptable. 9.3 No oxidation, contamination and distortion.								
10	Screen deformation 屏幕上的变形 	Test for insertion of plug gauge at highest warping point: (3.1-6.0inches) $H \leq 0.3\text{MM}$ The client has special requirements,according to drawing								

No.	Item 项目	Criteria (Unit: mm) 标准	
11	Bubble on Polarizer (Minor defect) 偏光片上的气泡(小瑕疵)	Diameter	Acc. Qty
		$\phi \leq 0.15$	Ignore
		$0.15 < \phi \leq 0.25$	2
		$0.25 < \phi \leq 0.3$	1
		$0.3 < \phi$	0
12	Dent on Polarizer (Minor defect) 偏光片上的凹痕(小瑕疵)	Diameter	Acc. Qty
		$\phi \leq 0.15$	Ignore
		$0.15 < \phi \leq 0.25$	2
		$0.25 < \phi \leq 0.30$	1
		$0.3 < \phi$	0
13	Bezel 边框	13.1 No rust, distortion on the Bezel.	
14	Touch Panel 触控面板	D: Diameter W: width L: length 14.1 Spot: $D \leq 0.20$ is acceptable $0.20 < D \leq 0.3$, acceptable QTY, 3 $D > 0.3$ is unacceptable 14.2 Dent (dot): $D \leq 0.20$ is acceptable $0.20 < D \leq 0.3$, acceptable QTY, 3 $D > 0.30$ is unacceptable 2 dots are acceptable and the distance between defects should more than 10 mm. Dent (line) According to the limit sample 14.3 Scratch: $W \leq 0.03$, $L \leq 10$ is acceptable, $0.03 < W \leq 0.10$, $L \leq 10$, acceptable QTY, 3 $W > 0.10$ is unacceptable. Distance between 2 defects should more than 10 mm.	
15	PCB	15.1 No distortion or contamination on PCB terminals. 15.2 All components on PCB must same as documented on the BOM/component layout. 15.3 Follow IPC-A-600F.	
16	Soldering 焊接	Follow IPC-A-610C standard	

No.	Item 项目	Criteria (Unit: mm) 标准
17	Electrical Defect (Major defect) 电气缺陷(主要缺陷)	<p>The below defects must be rejected.</p> <p>17.1 Missing vertical / horizontal segment,</p> <p>17.2 Abnormal Display.</p> <p>17.3 No function or no display.</p> <p>17.4 Current exceeds product specifications.</p> <p>17.5 LCD viewing angle defect.</p> <p>17.6 No Backlight.</p> <p>17.7 Dark Backlight.</p> <p>17.8 Touch Panel no function.</p> <p>17.9 Dark Dot –one Allowed.</p> <p>17.10 Bright Dot – one Allowed.</p> <p>Remark:</p> <p>1. A pixel defect is acceptable if one color is none functional and causes a bright dot. The display may have one case where one color is out and cause a dark dot.</p> <p>2. Bright dot caused by scratch and foreign object accords to item1.</p>
18	Light leak 漏光	Yellow light OK; White light,According to the limit sample

Remark: Visual and cosmetic defects are rejectable only if these fall within the LCD viewing area.

10.5 Classification of Defects 缺陷的分类

Visual defects (Except no / wrong label) are treated as minor defect and electrical defect is major.

10.6 Identification/marketing criteria 识别/评分标准

Any unit with illegible / wrong /double or no marking/ label shall be rejected.

10.7 Packing 包装

10.7.1 There should be no damage of the outside carton box, each packaging box should has label in the correct location per packing drawing requirement.

10.7.2 All direct package materials shall offer ESD protection.

11 Reliability Specification 可靠性规范

Item 项目	Condition 条件	Cycle Time 周期时间	Quantity 数量	Remark 备注
Constant Temp. and Constant Humidity Operation Test 恒温恒湿运行试验	+40 ± 3°C,90 ± 3%RH	96hrs	--	*1
High Temp. Operation Test 高温操作试验	+70 ± 3°C	96hrs	--	
Low Temp. Operation Test 低温操作试验	-20 ± 3°C	96hrs	--	
Thermal Shock Test 热冲击试验	-20 ± 3°C (30min)	10cycles	--	

	+70 ± 3°C (30min)			
ESD Test(end product) ESD 测试 (最终产品)	150pF, 330Ω, ±2KV, Contact	10times	--	*2, *3
	150pF, 330Ω, ±6KV, Air			
Vibration Test(for packaging) 振动 测试(包装)	Frequency: 10Hz to 55Hz to 10Hz, Swing: 1.5mm, time: X, Y, Z each 2H.	6hrs	One inner carton	*4

Note 1. For humidity test, DI water should be used.

Inspection Standard: Inspect after 1-2hrs storage at room temperature, the sample shall be free from the following defects:

- Air bubble in the LCD
- Seal Leakage
- Non-display
- Missing Segment
- Glass Crack
- IDD is greater than twice initial value.
- Others as per QA Inspection Criteria

Note 2. No defect is allowed after testing

The End Product ESD value is only indicative and depends on customer ESD protection design for the whole system.

Note 3. ESD should be applied to LCD glass panel, not other areas (such as on IC and so on) IDD should be within twice initial value.

In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part.

Note 4. Only upon request.

12 Precautions and Warranty 注意事项和保证

12.1 Safety 安全

12.1.1 The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

12.1.2 Since the liquid crystal cells are made of glass, do not apply strong impact on them.

Handle with care.

12.2 Handling 处理

12.2.1 Reverse and use within ratings in order to keep performance and prevent damage.

12.2.2 Do not wipe the polarizer with dry cloth, as it might cause scratch. If the surface of the LCD needs to be cleaned, wipe it swiftly with cotton or other soft cloth soaked with petroleum IPA, do not use other chemicals.

12.3 Operation 操作

12.3.1 Do not drive LCD with DC voltage

12.3.2 Response time will increase below lower temperature

12.3.3 Display may change color with different temperature

12.3.4 Mechanical disturbance during operation, such as pressing on the display area, may

cause the segments to appear “fractured”.

12.4 Static Electricity 静电

12.4.1 CMOS LSIs are equipped in this unit, so care must be taken to avoid the electro-static charge, by ground human body, etc.

12.4.2 The normal static prevention measures should be observed for work clothes and benches.

12.4.3 The module should be kept into anti-static bags or other containers resistant to static for storage.

12.5 Limited Warranty 有限质量保证

12.5.1 Unless otherwise agreed between HuaXia RGB Display and customer, HuaXia RGB Display will replace or repair any of its LCD and LCM which HuaXia RGB Display found to be defective electrically and visually when inspected in accordance with HuaXia RGB Display Quality Standards, for a period of one year from date of shipment.

12.5.2 The warranty liability of HuaXia RGB Display is limited to repair and/or replacement. HuaXia RGB Display will not be responsible for any consequential loss.

12.5.3 If possible, we suggest you use up all modules in six months. If the module storage time over twelve months, we suggest that recheck it before the module be used.

13 Packaging 包装

TBD

14 Prior Consult Matter 免责声明

1. For HuaXia RGB Display standard products, we keep the right to change material, process for improving the product property without prior notice to our customer.

2. For OEM products, if any changes are needed which may affect the product property, we will consult with our customer in advance.

3. If you have special requirement about reliability condition, please let us know before you start the test on our samples.

Reference 参考

Item 项目	Description 描述	Revision 修订
ST77903	IC Data sheet	V0
Panel 1.65.0 寸 400X400	LCM assembly drawing	V0